

CANIS GO 410 REVERSE

Our entry-level Canis GO 410 Reverse is as good as it gets. While it is lighter in weight than the original Canis work light, the operational lumens output is just as high. Best suited to construction, forestry, agriculture, and material handling, the Canis GO 410 Reverse has a round form factor and pedestal mounting, it produces zero emissions (EMC CISPR 25 class 5) and its light output is 1000 lumens



Not all products are available in all markets. During continuous improvement specifications and design are changing. All values are nominal values. Illustrations do not necessarily show the design of every version and some features are version specific. The lumens output varies depending on lens colour.

TECHNICAL DATA

Theoretical Lumens Output	1900 lm	Vibration	8Grms 24-2000Hz
Operational Lumens Output	1200 lm	Lens	PC
Color Temperature	5000 K	Body / Housing	Aluminum
Nominal Voltage DC	12 - 24 V 36 - 48 V	Weight	0.5 kg
Input Voltage DC	9 - 16 V 18 - 32 V 30 - 64 V	IP Rating	IP68, IP6K9K
Power Consumption	18 W	Salt Spray Test	ISO 9227 240H
Nominal Current at	36-48V=0.38A, 24V=0.6A, 12V=1.1A	EMC	CISPR 25 Class 5, EN12895, ISO 13766, ISO 14982, ISO 7637-2, R10
Connector	Built-in Deutsch DT-2 (2-pin)	Operating Temperatures	-40°C... +85°C (Overheat protected)
Mount	Single Bolt M8 / M10	Electronics	Isolated
Shock	60G	Part Numbers	Reverse: 988-501B

CONNECTORS




Built-in Deutsch DT-2 (2-pin)

KEY FEATURES

- Reverse light (ECE R23)
- Operational lumens output: 1200lm
- Pure performance in a compact design

LIGHT PATTERNS

Canis GO 410 R, 1200lm Reverse

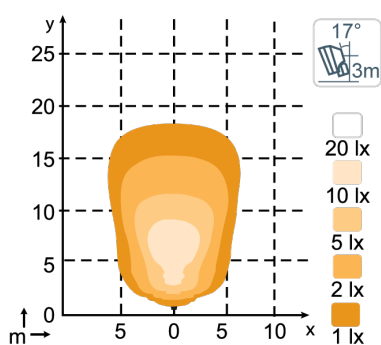

DRAWINGS

