# 3/4" Tiny Flush mount Lighthead

Installation and Operation Instruction

- 4 unit provide a directional warning signal approved to ECE R65.
  Small size lighthead for installation in tailgates,boot lids or side of vehicle.
- Multi-functional combo warning light with side marker,tail or front position.
- Aluminium base for efficient heat dissipation and maximum durability.

## 1.Technical Specifications

| | |
|---|---|
| **Peak Power** | 0.3A@12VDC,0.16A@24VDC each unit |
| **Voltage** | DC 10-30V |
| **Color** | Single |
| **LED** | Warning:5W x 1pcs<br>Position:0.2W x 2pcs |
| **Flash Pattern** | 14 |
| **IP Rating** | IP67 |
| **Operating Temperature** | -30℃ to +60 ℃ |
| **Mount** | Flush/Tube |
| **Certifications** | ECE R65 Class1(4 units);R10;R148;<br>SAE J595;DOT P2 P3. |

## 2.Flash Patterns

| | | | |
|---|---|---|---|
| 1 | Single 2HZ | 8 | Single to Double 2HZ |
| 2 | Double 2HZ | 9 | Single to Quad 2HZ |
| 3 | Single SAE | 10 | Single to Double SAE |
| 4 | Double SAE | 11 | Single to Quad SAE |
| 5 | Quad 2HZ | 12 | Single to Warp |
| 6 | Quad SAE | 13 | Steady on 50% |
| 7 | Warp 1HZ | 14 | Steady on 10% |

## 3.Mounting

3.1 Drill a hole




3.2 Mounting rubber grommet



3.3 Mounting light

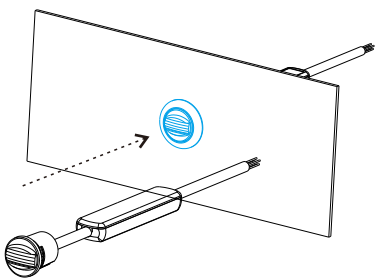

**ECE R65 MOUNTING**

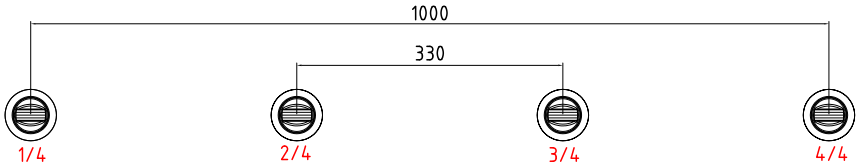


## 4.Wiring Instruction

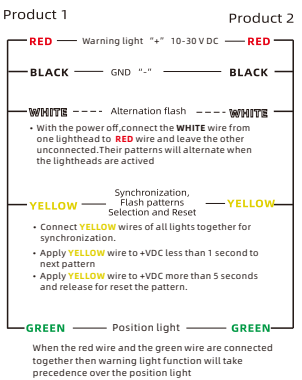





**A 1A fuse is required for connecting the positive terminal of the product to the battery.**

## 5.Dimensions

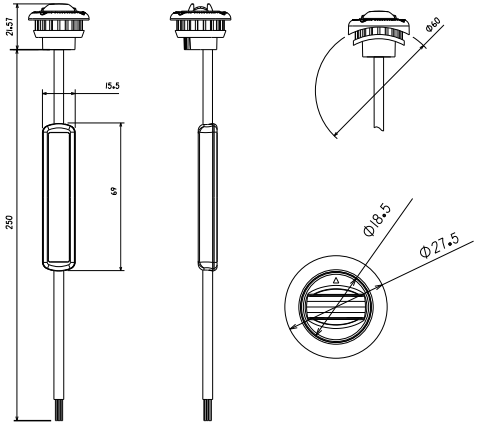


SKU: **64517 / 64518 / 64519**

Importeret af SSE A/S | Mariendalsvej 28, 8800 Viborg, DK | +45 87 41 10 00 | Produceret i Taiwan